

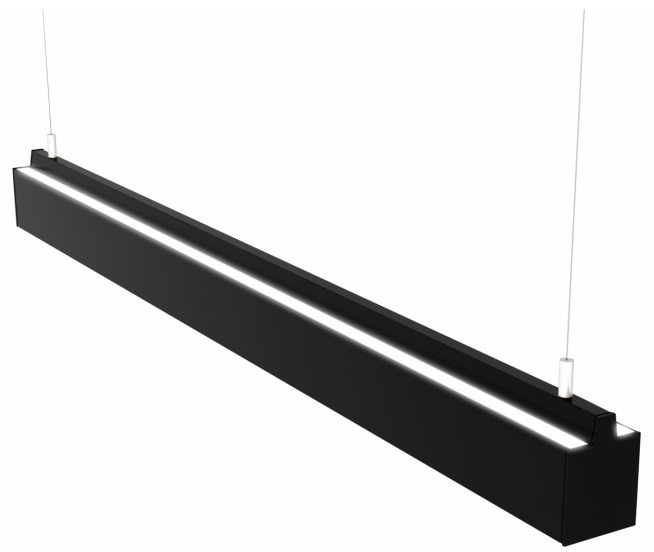


NORD-R

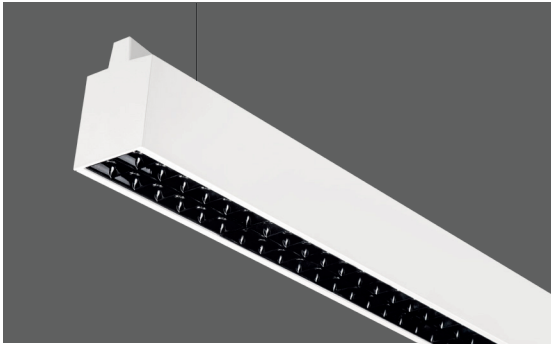

Standard Colours



OPTICAL

Direct&Indirect light distribution
 36° beam angle
 UGR<16
 Lifetime (L90/ B10): 50000 h.(tq+25°C)
 Lifetime (L80/B20): 100000 h. (tq+25°C)
 SMD LED module
 Color rendering index: CRI>80
 MacAdams SDCM 3

MECHANICAL

Extruded aluminium profile housing
 Dark reflector with glare control
 Opal diffuser for indirect light
 IP20 protection degree
 Impact resistance IK02
 Glow-wire test resistance 650°C

ELECTRICAL



Halogen-free wiring
 220-240V-50/60Hz
 Power factor >0.95
 Constant current, Class I, isolated driver
 CE - IEC 60598-1 - EN 60598-1
 Ambient temperature from -20°C to +50°C
 On-Off Control - (Code: .N000)

OPTIONAL

DALI - (Code: .DXXX)
 1-10V - (Code: .MXXX)
 Emergency kit
 CBS connection
 Color temperature (K) options
 RAL colour selection

INSTALLATION

Ceiling suspended..

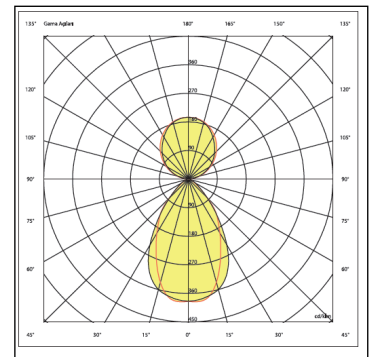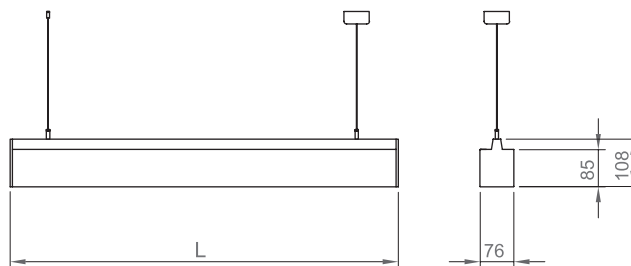

Product Code	Power (W)	Lumen (lm)	CCT (K)	CRI	Dimensions WxLxH (mm)	Cut-Out WxL (mm)	Weight (kg)
01181.71.30.060	56	6040	3000K	Ra>80	76x1125x108	N/A	3,2

All electrical values given are rated values. Luminous flux and connected electrical load are subject to an initial tolerance of +/- 10%. Tolerance of colour temperature: +/-150 K. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Any information including technical parameters and product codes may differ from standard products in catalogue & web site due to customization made per projects.

Ikizler Lighting has the right to make changes or cancellations on the products without notification. Updated information on the products can be received from our web site.